

1. A 50 MHz uniform plane wave is propagating in a material with relative permeability and relative permittivity as 2.25 and 1 respectively. The material is assumed to be loss less. Find the phase constant of the wave propagation.
- (A)  $\pi$  rad/m      (B)  $\frac{\pi}{4}$  rad/m      (C)  $\frac{\pi}{2}$  rad/m      (D)  $2\pi$  rad/m
- 
2. A non-magnetic lossy dielectric material with relative permittivity  $\epsilon_r = 2.25$  and conductivity  $\sigma = 10^{-4}$  mho/m is applied with electromagnetic wave of 2.5 MHz. What is the loss tangent?
- (A) 0.32      (B) 3.13      (C) 11.11      (D) None of the above
- 
3. A solid conductor with relative permeability  $\mu_r = 200$ , conductivity  $\sigma = 5 \times 10^6$  mho/m having outer dia 8 mm and length 2 mm. If the total current carried by the conductor is  $i(t) = 2\cos(\pi 10^4 t)$  A. Find the skin depth.
- (A) 2.25 mm      (B) 0.225 mm      (C) 0.16 mm      (D) 1.60 mm
- 
4. A uniform plane wave at the boundary of an overhead transmission line and underground cable has reflection coefficient:  $\gamma$ . The standing wave ratio is
- (A)  $\frac{(1-\gamma)}{(1+\gamma)}$       (B)  $\frac{(1-|\gamma|)}{(1+|\gamma|)}$       (C)  $\frac{(1+|\gamma|)}{(1-|\gamma|)}$       (D)  $\frac{(1+\gamma^2)}{(1-\gamma)}$
- 
5. Working principle of thermo-couple is
- (A) Seebach effect      (B) Hall effect      (C) Faraday's law      (D) None of the above
- 
6. Which of the following represents a stable system?
- (A) Impulse response of the system increases exponentially.  
(B) Area within the impulse response is infinite.  
(C) Roots of the characteristic equation of the system are real and negative.  
(D) None of the above

7. Of following transfer function of second order linear time-invariant systems, the under damped system is represented by?

(A)  $H(s) = \frac{1}{s^2 + 4s + 4}$

(B)  $H(s) = \frac{1}{s^2 + 5s + 4}$

(C)  $H(s) = \frac{1}{s^2 + 4.5s + 4}$

(D)  $H(s) = \frac{1}{s^2 + 3s + 4}$

8. Which of the following measures cannot be effective in reducing the noise?

(A) Reduction in signalling rate

(B) Increase in transmitted power

(C) Increase in channel bandwidth

(D) None of the above

9. Assuming leakage flux to be negligible, when HV side of a single-phase 100 V/50 V, 50 Hz transformer is connected to 50 V, 25 Hz AC source, the core flux of the transformer is


(A) same as that of rated flux

(B) half that of the rated flux

(C) twice that of the rated flux

(D) four times that of the rated flux

10. The Schmitt trigger circuit shown in the figure below uses Zener diode with  $V_d = 0.7V$ . If the threshold voltage  $V_1$  is zero and hysteresis voltage  $V_H = 0.2V$ , then what is  $\frac{R_1}{R_2}$  and  $V_R$  ?

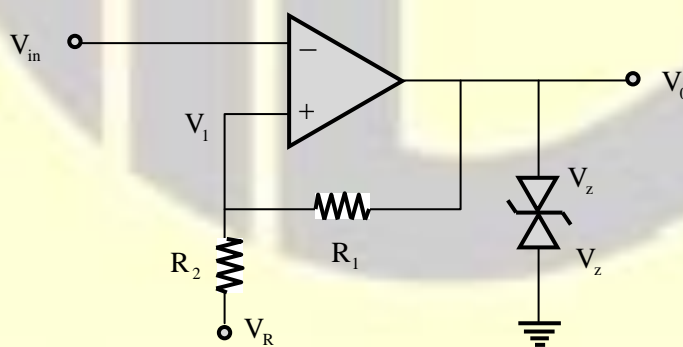

(A)  $\frac{R_1}{R_2} = 67$  and  $V_R = 0.15 V$

(B)  $\frac{R_1}{R_2} = 67$  and  $V_R = -0.15 V$

(C)  $\frac{R_1}{R_2} = 66$  and  $V_R = -0.10 V$


(D)  $\frac{R_1}{R_2} = 66$  and  $V_R = -0.15 V$

11. For a given relation  $\sqrt{1-x^2} + \sqrt{1-y^2} = P(x-y)$ , where P is a constant, the value of  $dy/dx$  at point (0, 0) is  
 (A) -1                      (B) 0                      (C) 1                      (D) -2

12. The integral  $\int_0^1 \int_0^{x^2} (x^2 + y^2) dx dy$  equals to  
 (A)  $\frac{26}{105}$                       (B)  $\frac{4}{105}$                       (C)  $\frac{12}{105}$                       (D)  $\frac{16}{105}$

13. An open-loop system represented by the transfer function,  $G(s) = \frac{(s-1)}{(s+2)(s+3)}$  is  
 (A) stable and of the minimum phase type  
 (B) stable and of the non-minimum phase type  
 (C) unstable and of the minimum phase type  
 (D) unstable and of the non-minimum phase type


14. A load center of 120 MW derives power from two power stations connected by 220 kV transmission lines of 25 km and 75 km as shown in figure below. The three generators  $G_1, G_2$  and  $G_3$  are of 100 MW capacity each and have identical fuel cost characteristics. The minimum loss generation schedule for supplying the 120 MW load is

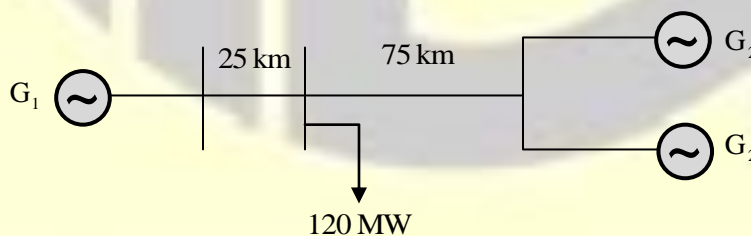

- |                   |                   |                   |                   |
|-------------------|-------------------|-------------------|-------------------|
| (A) $P_1 = 90$ MW | (B) $P_1 = 80$ MW | (C) $P_1 = 60$ MW | (D) $P_1 = 40$ MW |
| $P_2 = 15$ MW     | $P_2 = 20$ MW     | $P_2 = 30$ MW     | $P_2 = 40$ MW     |
| $P_3 = 15$ MW     | $P_3 = 20$ MW     | $P_3 = 30$ MW     | $P_3 = 40$ MW     |


15. A capacitor is made with a polymeric dielectric having a relative permittivity  $\epsilon_r$  of 2.26 and a dielectric breakdown strength of 50 kV/cm. The permittivity of free space is 8.85 pF/m. If the rectangular plates of the capacitor have a width of 20 cm and a length of 40 cm, then the maximum electric charge in the capacitor is
- (A)  $2 \mu\text{C}$                       (B)  $4 \mu\text{C}$                       (C)  $8 \mu\text{C}$                       (D)  $10 \mu\text{C}$

16. For a circuit shown below calculate the value of  $i_1$ ?

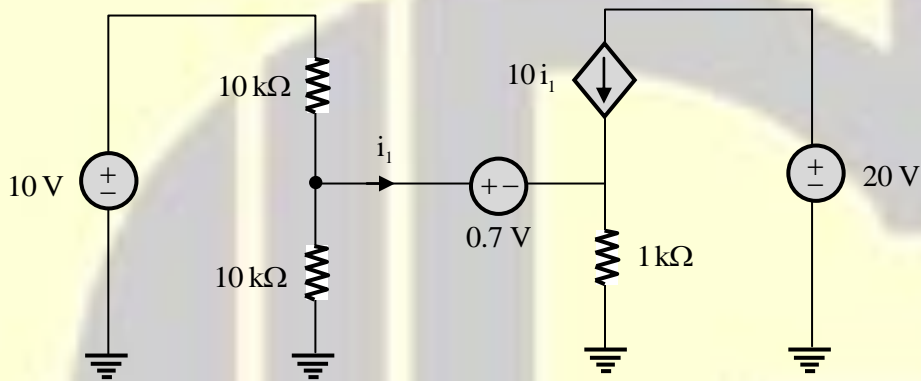

- (A)  $\frac{43}{160}$  mA                      (B)  $\frac{117}{32}$  mA                      (C)  $\frac{117}{22}$  mA                      (D)  $\frac{117}{11}$  mA

17. Calculate  $v_1$  for the circuit given below?

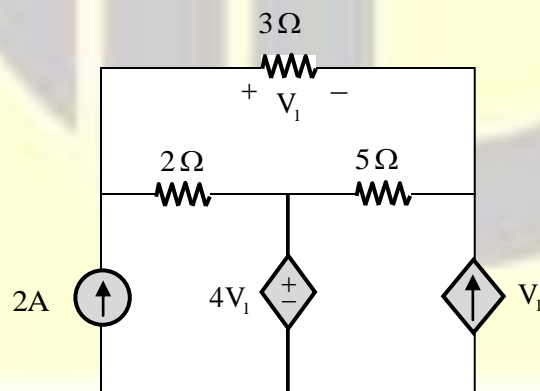

- (A)  $\frac{28}{5}$  V                      (B)  $\frac{48}{25}$  V                      (C)  $\frac{128}{25}$  V                      (D)  $\frac{12}{25}$  V

18. What is Laplace transform of function  $e^{-5t} \cos 4t$ ?

- (A)  $\frac{(s+4)}{((s+4)^2 + 25)}$  (B)  $\frac{5}{((s+4)^2 + 25)}$   
(C)  $\frac{4}{((s+5)^2 + 16)}$  (D)  $\frac{s+5}{((s+5)^2 + 16)}$

19. Given digits 2, 2, 3, 3, 3, 4, 4, 4, 4. How many distinct 4 digit numbers greater than 3000 can be formed using these digits?

- (A) 50 (B) 51 (C) 52 (D) 54

20. The characteristic equation of a  $3 \times 3$  matrix P is defined as:

$$|\lambda I - P| = \lambda^3 + \lambda^2 + 2\lambda + 1 = 0$$

“I” denotes identity matrix, then inverse of matrix P will be:

- (A)  $P^2 + P + 2I$  (B)  $P^2 + P + I$   
(C)  $-(P^2 + P + I)$  (D)  $-(P^2 + P + 2I)$

21. A function  $y(t)$  satisfies the following differential equation:

$$\frac{dy(t)}{dt} + y(t) = \delta(t)$$

Where  $\delta(t)$  is unit impulse function and  $u(t)$  is unit step function. Assuming zero initial conditions, what is  $y(t)$ ?

- (A)  $e^t$  (B)  $e^{-t}$  (C)  $e^t u(t)$  (D)  $e^{-t} u(t)$

22. A solid non-magnetic conductor of circular cross section has its axis on z-axis and carries a uniformly distributed total current of 60 A in the  $a_z$  direction. If the radius of the conductor is 4 mm, find the magnetic flux density at  $\rho = 5$  mm.

- (A) 3.1 mT (B) 2.1 mT (C) 2.4 mT (D) 4.0 mT

23. The magnetic flux density in a magnetic material with susceptibility  $\chi_m = 6$  in a given region as  $B = 0.005y^2 \mathbf{a}_x$  T. Find the magnitude of current of current density  $J$  at  $y = 0.4$  m
- (A)  $\frac{10^4}{7\pi}$  A/m<sup>2</sup>      (B)  $\frac{10^4}{5\pi}$  A/m<sup>2</sup>      (C)  $\frac{10^2}{\pi}$  A/m<sup>2</sup>      (D) None of the above
- 
24. The internal inductance of a straight wire of circular cross-section with radius  $r$ , length  $\ell$  and permeability  $\mu$  is
- (A)  $\frac{\mu}{2\pi} \ell \ln\left(\frac{r}{\ell}\right)$  H/m      (B)  $\frac{\mu}{4\pi}$  H/m
- (C)  $\frac{\mu}{8\pi}$  H/m      (D) None of the above
- 
25. Determine the energy density in free space created by a magnetic field with intensity  $H = 10^3$  A/m.
- (A) 314 mJ/m<sup>3</sup>      (B) 314  $\mu$ J/m<sup>3</sup>
- (C) 628 mJ/m<sup>3</sup>      (D) 628  $\mu$ J/m<sup>3</sup>
- 
26. A triangle defined by A(2, -5, 1), B(0, 2, 4) and C(0, 3, 1). What is area of the triangle?
- (A) 10.11      (B) 12.41      (C) 16.12      (D) 8.41
- 
27. A 2 mC positive charge is located in vacuum at point  $P_1(3, -2, -4)$  and 5  $\mu$ C negative charge is located at  $P_2(1, -4, 2)$ . What is the magnitude of force on the charge at  $P_1$  ?
- (A) 2.04 N      (B) 1.96 N      (C) 2.91 N      (D) 3.10 N
- 
28. Four infinite uniform sheets of charges with following uniform charge density are placed at different points in space as following:
- Sheet-1: 20 pC/m<sup>2</sup> at  $y = 7$
- Sheet-2: -8 pC/m<sup>2</sup> at  $y = 3$

Sheet-3:  $6\text{pC}/\text{m}^2$  at  $y = -1$

Sheet-4:  $-18\text{pC}/\text{m}^2$  at  $y = -4$

Find the magnitude of Electric field  $E$  at point  $P(2, 6, -4)$ . Consider relative permittivity of the medium as 1.

- (A)  $\frac{40}{18\pi}\text{V/m}$       (B)  $40\pi\text{V/m}$       (C)  $\frac{18\pi}{25}\text{V/m}$       (D)  $18\pi\text{V/m}$

29. A  $25\ \mu\text{C}$  point charge is located at origin. Calculate electric flux passing through the portion of sphere defined by  $r = 20\text{ cm}$ , bounded by  $\theta = 0$  and  $\pi\text{ rad}$ ,  $\phi = 0$  and  $\frac{\pi}{2}\text{ rad}$ .

- (A)  $5\ \mu\text{C}$       (B)  $25\ \mu\text{C}$       (C)  $6.25\ \mu\text{C}$       (D)  $12.5\ \mu\text{C}$

30. A dielectric material is placed in vacuum in a uniform electric field of  $E = 4\text{ V/m}$ . What is the electric field inside the material if the relative permittivity of dielectric material is 2?

- (A) Zero      (B)  $4\text{ V/m}$       (C)  $2\text{ V/m}$       (D)  $8\text{ V/m}$

31. Find the relative permittivity of dielectric material used in a parallel plate capacitor if electric flux density  $D = 15\ \mu\text{C}/\text{m}^2$  and energy density is  $20\text{ J/m}^3$ .

- (A) 0.6      (B) 0.8      (C) 0.9      (D) 1.1

32. For a homogeneous medium with volume charge density  $\rho_v$ , permittivity  $\epsilon$  and voltage  $V$ . What is the  $\nabla^2 V$ ?

- (A)  $-\rho_v\epsilon$       (B)  $\frac{\rho_v}{\epsilon}$       (C)  $\rho_v\epsilon$       (D)  $-\frac{\rho_v}{\epsilon}$

33. Which among the following equation is true for a steady magnetic field? Where  $B$  is magnetic flux density,  $J$  is current density and  $H$  is magnetic field intensity.

- (A)  $\nabla \cdot B = J$       (B)  $\nabla \times H = 0$       (C)  $\nabla \times H = J$       (D) None of the above



34. An electron beam carries a total current of  $-500 \mu\text{A}$  in the  $a_z$  direction and has a current density  $J_z$  in the region  $0 \leq r \leq 10^{-4} \text{m}$  and zero in the region  $r > 10^{-4} \text{m}$ . Electron beam velocity is given by  $V_z = (8 \times 10^7 z) \text{m/s}$ . Calculate the volume charge density at  $z = 2 \text{cm}$ .
- (A)  $200 \text{ mC/m}^3$       (B)  $10 \text{ mC/m}^3$       (C)  $-10 \text{ mC/m}^3$       (D)  $-200 \text{ mC/m}^3$
- 
35. Find the magnitude of the electric field intensity in a sample of silver having conductivity  $\sigma = 6.17 \times 10^7 \text{ mho/m}$ , permittivity  $\mu_e = 0.006 \text{ m}^2/\text{Vs}$  and drift velocity  $1 \text{ mm/s}$ .
- (A)  $\frac{1}{10} \text{ V/m}$       (B)  $\frac{1}{3} \text{ V/m}$       (C)  $\frac{1}{2} \text{ V/m}$       (D)  $\frac{1}{6} \text{ V/m}$
- 
36. Which among the following statement is correct regarding an ideal conductor in a static electric field?
- (A) Static electric field intensity inside conductor is non zero  
(B) Static field intensity outside conductor is zero  
(C) Static field intensity at the surface of conductor is directly normal to the surface  
(D) Static field intensity at the surface of the conductor is directly parallel to the surface
- 
37. Consider electron and hole mobilities of germanium at  $300\text{K}$  is  $0.36 \text{ m}^2/\text{Vs}$  and  $0.17 \text{ m}^2/\text{Vs}$  respectively and hole and electron concentration of  $2.7 \times 10^{19} \text{ per m}^3$ . Find the conductivity of germanium at  $300 \text{ K}$ .
- (A)  $1.4 \text{ mho/m}$       (B)  $2.3 \text{ mho/m}$       (C)  $1.3 \text{ mho/m}$       (D)  $2.0 \text{ mho/m}$
- 
38. The technology 'CMOS' used for fabricating integrated circuit refers to
- (A) Compound Metal Oxide Semiconductor  
(B) Complementary Metal Oxide Semiconductor  
(C) Conditional Metal Oxide Semiconductor  
(D) Compound Metal Oxide Superconductor
-




39. A 3 phase, 50 Hz synchronous generator is connected to an infinite bus. The maximum power that can be transferred to infinite bus is 1 p.u. The mechanical input to the generator is  $\frac{\sqrt{3}}{2}$  p.u. Inertia constant of the generator is 5s. Find the natural frequency of oscillation of the system?
- (A)  $\sqrt{10\pi}$  rad/sec (B)  $\sqrt{20\pi}$  rad/sec  
(C)  $\sqrt{15\pi}$  rad/sec (D)  $\sqrt{5\pi}$  rad/sec
- 
40. A 3 phase, 50 Hz synchronous generator is connected to an infinite bus through a transformer and two parallel transmission lines. The input mechanical power to synchronous generator is 0.8 p.u. Grid is consuming a power of  $0.8 + j0.4$  p.u., generator impedance is 0.25 p.u., transformer impedance is 0.5 p.u. and each transmission line impedance is 0.5 p.u. If the infinite bus voltage is  $1\angle 0$  p.u. then, what is the generator voltage load angle?
- (A)  $26.56^\circ$  (B)  $31.30^\circ$  (C)  $30^\circ$  (D)  $60^\circ$
- 
41. Which is the power semiconductor device having highest switching speed?
- (A) SCR (B) IGBT (C) MOSFET (D) GTO
- 
42. For a PN junction diode, width of space charge region increases as?
- (A) Forward bias voltage increases (B) Reverse bias voltage increases  
(C) Forward bias voltage reduces (D) Reverse bias voltage reduces
- 
43. If unit step response of a network is  $(1 - e^{-\alpha t})$  then its unit impulse response will be
- (A)  $\alpha e^{-\alpha t}$  (B)  $\alpha e^{-\frac{1}{\alpha t}}$  (C)  $\frac{1}{\alpha} e^{-\alpha t}$  (D)  $(1 - \alpha) e^{-\alpha t}$
- 
44. What is the Laplace transform of function  $\delta(t - 2)$ ?
- (A) 2 (B) 0 (C)  $e^{-2s}$  (D) 2s

45. What is the range of 'K' for which the unity feedback closed loop system with open loop gain  $G(s) = \frac{K}{s^2(s+a)}$  will be unstable?
- (A)  $-a < K < a$       (B)  $K > 0$       (C)  $K = 0$       (D)  $-\infty < K < \infty$

46. A power supply having output resistance  $1.5 \Omega$  supplies a full load current of  $500 \text{ mA}$  to a  $50 \Omega$  load. Determine the percentage voltage regulation of supply?
- (A) 2%      (B) 3%      (C) 4%      (D) 5%

47. Find the voltage  $V_N$  for the circuit shown below?

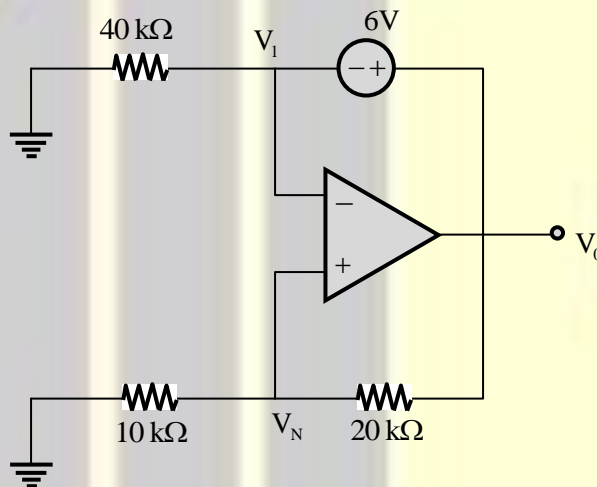

- (A) 6 V      (B) 4 V      (C) 5 V      (D) 3 V

48. The integral  $\frac{1}{2\pi} \int_0^{2\pi} \sin(t-\tau) \cos \tau d\tau$  equals to

- (A)  $\sin t \cos t$       (B) 0      (C)  $\frac{1}{2} \cos t$       (D)  $\frac{1}{2} \sin t$

49. If  $u(t)$ ,  $r(t)$  denote unit step and unit ramp function respectively and  $u(t)*r(t)$  their convolution, then function  $u(t+1)*r(t-2)$  is

- (A)  $\frac{1}{2}(t-1)(t-2)$  (B)  $\frac{1}{2}(t-1)^2(t-2)$   
 (C)  $\frac{1}{2}(t-1)^2 u(t-1)$  (D) None of the above


50. Consider function  $f(x) = (x^2 - 4)^2$ , where  $x$  is a real number. The function  $f(x)$  has

- (A) Only one minimum (B) Only two minima  
 (C) Only three maxima (D) None of the above

51.  $A$  is an  $(m \times n)$  matrix with  $m > n$  and ' $I$ ' is identity matrix. Let  $A_1 = (A^T A)^{-1} A^T$ , then which of the following statement is false?

- (A)  $AA_1 A = A$  (B)  $(AA_1)^2 = AA_1$   
 (C)  $AA_1 = I$  (D)  $AA_1 A = A_1$

52. For the circuit diagram shown below, calculate the voltage across capacitor  $V(t)$  at  $t = 160 \mu\text{s}$ ?

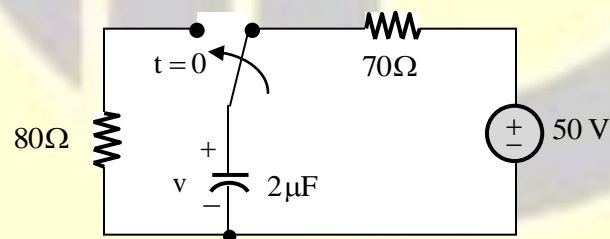


- (A) 16.5 V (B) 18.4 V (C) 20.2 V (D) None of the above

53. Consider a parallel RLC circuit having inductance of 10 mH, capacitance of 100  $\mu$ F. Determine the value of resistance that would lead to a critically damped response?  
(A) 5  $\Omega$                       (B) 10  $\Omega$                       (C) 20  $\Omega$                       (D) 15  $\Omega$
- 
54. A power BJT has collector current  $I_c = 20$  A at  $I_b = 2.5$  A and reverse saturation current  $I_{CS} = 15$  mA. Find out the current gain  $\beta$ ?  
(A) 8                      (B) 7.95                      (C) 7                      (D) 8.95
- 
55. One cycle of square wave signal observed on an oscilloscope is found to occupy 6 cm at a scale setting of 30  $\mu$ s/cm. What is the signal frequency?  
(A) 1.8 kHz                      (B) 5.55 kHz                      (C) 18 kHz                      (D) 55.5 kHz
- 
56. Two equal voltages of same frequency applied to X and Y plates of CRO produce a circle on the screen. The phase difference between the two voltages will be?  
(A) 30°                      (B) 60°                      (C) 90°                      (D) 150°
- 
57. The magnetic field intensity of uniform plane wave in air is 20 A/m in the direction  $a_y$ . The wave is propagating in the  $a_z$  direction at a frequency of  $2 \times 10^9$  rad/s. What is the wave length of plane wave.  
(A)  $\frac{3}{20}$  m                      (B)  $\frac{3}{10}$  m                      (C)  $\frac{3\pi}{20}$  m                      (D)  $\frac{3\pi}{10}$  m
- 
58. A loss less transmission line segment has characteristic impedance  $Z_0 = 100 \Omega$  electromagnetic wave propagation velocity in the transmission line  $v = 0.8$  times velocity of light in vacuum. The frequency of the electromagnetic wave transmitted is 100 MHz. The phase constant is  $\beta$  and  $\beta\ell = \pi$  rad, then what is the length of the transmission line segment  $\ell$ ?  
(A) 24 m                      (B)  $\frac{12\pi}{10}$  m                      (C)  $\frac{10\pi}{12}$  m                      (D) 1.2 m
-

59. A 100 pF capacitor has a maximum charging current of 150  $\mu$ A. What is the slew rate of capacitor?  
(A) 1.50 V/s                      (B) 0.67 V/ $\mu$ s                      (C) 0.67 V/s                      (D) 1.50 V/ $\mu$ s
- 
60. An operational amplifier has a time rate of change of voltage of 2 V/ $\mu$ s. If the peak output voltage is 12 V, what is the bandwidth of the amplifier?  
(A)  $\frac{1}{12\pi}$  MHz                      (B)  $\frac{1}{24\pi}$  kHz                      (C)  $\frac{1}{24\pi}$  MHz                      (D) None of the above
- 
61. A 10 kVA, 200 V/2000 V transformer is feeding a load resistance of 2.5 p.u. based on ratings of HV side. The actual value of load resistance referred to LV side?  
(A) 10  $\Omega$                       (B) 100  $\Omega$                       (C) 1000  $\Omega$                       (D) 10000  $\Omega$
- 
62. While performing short circuit test on a single-phase 110/220 V, 50 Hz transformer with LV side shorted, wattmeter reading is found to be 20 W. If the same test is performed on the transformer with HV side shorted, the wattmeter reading will be?  
(A) 5 W                      (B) 10 W                      (C) 20 W                      (D) 40 W
- 
63. For a 3-phase slip-ring induction motor, the electrical rotor losses are proportional to  
(A) Synchronous speed                      (B) Air gap power  
(C) Slip                      (D) None of the above
- 
64. The blocked-rotor test of squirrel-cage induction motor determines?  
(A) Its equivalent series resistance and reactance as seen from the stator  
(B) Its equivalent shunt resistance and reactance as seen from the stator  
(C) Its equivalent series resistance and reactance as seen from the rotor  
(D) Its equivalent shunt resistance and reactance as seen from the rotor
-

65. Which among the following statement is true for a power system with lagging power factor?
- (A) Active power will flow from lagging voltage bus to leading voltage bus  
(B) Active power will flow from leading voltage bus to lagging voltage bus  
(C) Reactive power will flow from lagging voltage bus to leading voltage bus  
(D) Reactive power will flow from leading voltage bus to lagging voltage bus
- 
66. What is the volume charge density at point P(1, 2, 1) associated with electric flux field  $D = xy^2a_x + yx^2a_y + za_z$  C/m<sup>2</sup>.
- (A) 6 C/m<sup>3</sup>                      (B) 4 C/m<sup>3</sup>                      (C) 1 C/m<sup>3</sup>                      (D) 10 C/m<sup>3</sup>
- 
67. An electric Field is given by  $E = zy^2a_x + 2xyz a_y + xy^2a_z$  V/m, an incremental path is represented by  $\Delta L = -3a_x + 5a_y - 2a_z$   $\mu\text{m}$ . Find the work done in moving 4  $\mu\text{C}$  charge along the incremental path if the location of the path is at point P(1, 1, 1).
- (A) 20 pJ                      (B) 40 pJ                      (C) -40 pJ                      (D) -20 pJ
- 
68. Assuming zero voltage at infinity, find the potential at P(0, 0, 10) that is caused by a charge distribution of 10 nC/m along the line  $x = 0, y = 0, -1 < z < 1$  in free space.
- (A) 18 V                      (B) 8 V                      (C) 5 V                      (D) 20 V
- 
69. A point charge of +3  $\mu\text{C}$  and -3  $\mu\text{C}$  are located at (0, 0, 1) and (0, 0, -1) respectively, in free space. Find the magnitude of dipole moment. Consider distances in meters.
- (A) 12  $\mu\text{Cm}$                       (B) 6  $\mu\text{Cm}$                       (C) 18  $\mu\text{Cm}$                       (D) 3  $\mu\text{Cm}$
-

70. In the circuit shown below, steady state was reached when the switch 's' was open. The switch was closed at  $t = 0$ . The initial value of the current through the capacitor  $2C$  is

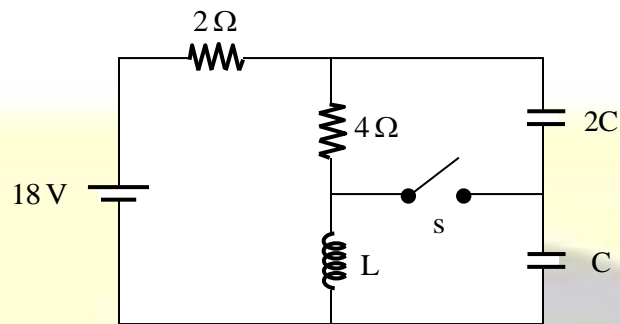

- (A) 0 A                      (B) 1 A                      (C) 2 A                      (D) 3 A

71. The Laplace transform of  $(t^2 - 2t)u(t-1)$  is?

- (A)  $\frac{2}{s^3}e^{-s} - \frac{2}{s^2}e^{-s}$                       (B)  $\frac{2}{s^3}e^{-s} + \frac{2}{s^2}e^{-s}$   
 (C)  $\frac{2}{s^3}e^{-2s} - \frac{2}{s^2}e^{-s}$                       (D) None of the above

72. A source  $V_s = 200\cos\omega t$  delivers power to a load at power factor 0.8 lag. The reactive power is 300 VAR. The Active Power is given by?


- (A) 200 Watts                      (B) 225 Watts                      (C) 400 Watts                      (D) 300 Watts

73. An ideal constant current source is connected in series with an ideal constant voltage source. Considering both together the combination will be a?

- (A) Constant voltage source                      (B) Constant current source  
 (C) Constant power source                      (D) None of the above



74. Calculate  $C_{eq}$  of the circuit given below?

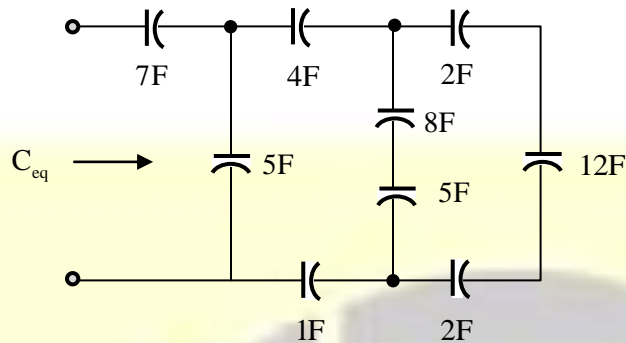

- (A)  $\frac{17}{3}$  F      (B)  $\frac{119}{38}$  F      (C) 5F      (D) 4F

75. The voltage across 2H inductor is  $6\cos(5t)$  V. Determine the resulting inductor current at  $t = \pi$ , if the inductor current at  $t = -\pi/2$  is 1 A?

- (A) 1.6 A      (B) +1 A      (C) -1.6 A      (D) Zero

76. Given the points  $A(x = 2, y = 3, z = -1)$  and  $B(r = 4, \theta = 30^\circ, \phi = 120^\circ)$ . Find distance between A and B.

- (A) 7.26      (B) 4.10      (C) 6.12      (D) 5.53

77. A synchronous motor is operating at constant load, while its excitation is adjusted to get unity power factor. If the excitation is now increased, the power factor will be?


- (A) Leading      (B) Remains at unity      (C) Lagging      (D) Becomes zero

78. If the positive, negative and zero-sequence reactances of an element of a power system are 0.3, 0.3 and 0.8 p.u. respectively, then the element would be a?

- (A) Synchronous generator      (B) Synchronous motor  
(C) Static load      (D) Transmission line

79. A 100 MW power station delivers 100 MW for 2 hours, 50 MW for 6 hours in a day and is shut down for maintenance for 45 days each year. Calculate its annual load factor?
- (A) 20%                      (B) 21%                      (C) 22.5%                      (D) 18.3%

80. Determine the inductor voltage 'V' in the circuit shown below for  $t > 0$ ?

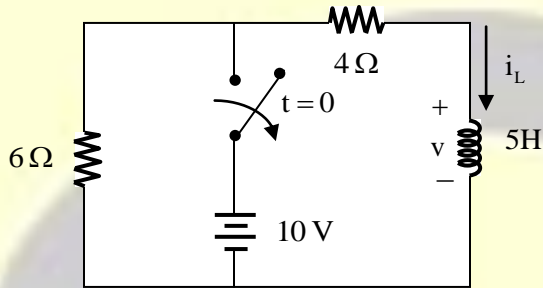

- (A)  $25e^{-2t}$                       (B)  $2.5e^{-0.5t}$                       (C)  $-2.5e^{-0.5t}$                       (D)  $-25e^{-2t}$

